

## SPECIFICATIONS:

**MODEL NUMBER:** 2088-313-544

**PUMP DESIGN:** Positive Displacement 3 Chamber Diaphragm Pump

**CHECK VALVE:** (1-Way Operation) Prevents Reverse Flow

**CAM:** 3.0 Degree

**MOTOR:** Permanent Magnet, P/N 11-226-06, Thermally Protected

**VOLTAGE:** 12 VDC Nominal

**PRESSURE SWITCH:** Splash-Proof

Factory Set @ 45 PSI Shut-Off, Turn On 25 PSI  $\pm$  5 PSI

**LIQUID TEMPERATURE:** 130 Degrees Fahrenheit (54 Degrees Centigrade) Max.

**PRIME:** Self-Priming Up To 8 Ft. Vertical,  
Max. Inlet Pressure 30 PSI

**PORTS:** 1/2"-14 Male Parallel Thread

**MATERIAL OF CONSTRUCTION:**

PLASTICS- Polypropylene

VALVES- Viton

DIAPHRAGM- Santoprene


FASTENERS- Stainless Steel

**NET WEIGHT:** 6.0 Lbs (2.7 Kg)


**DUTY CYCLE:** Continuous (See Temperature Rise Chart)

**TYPICAL APPLICATIONS:** Ag Transfer / Spray

## DIMENSIONS:

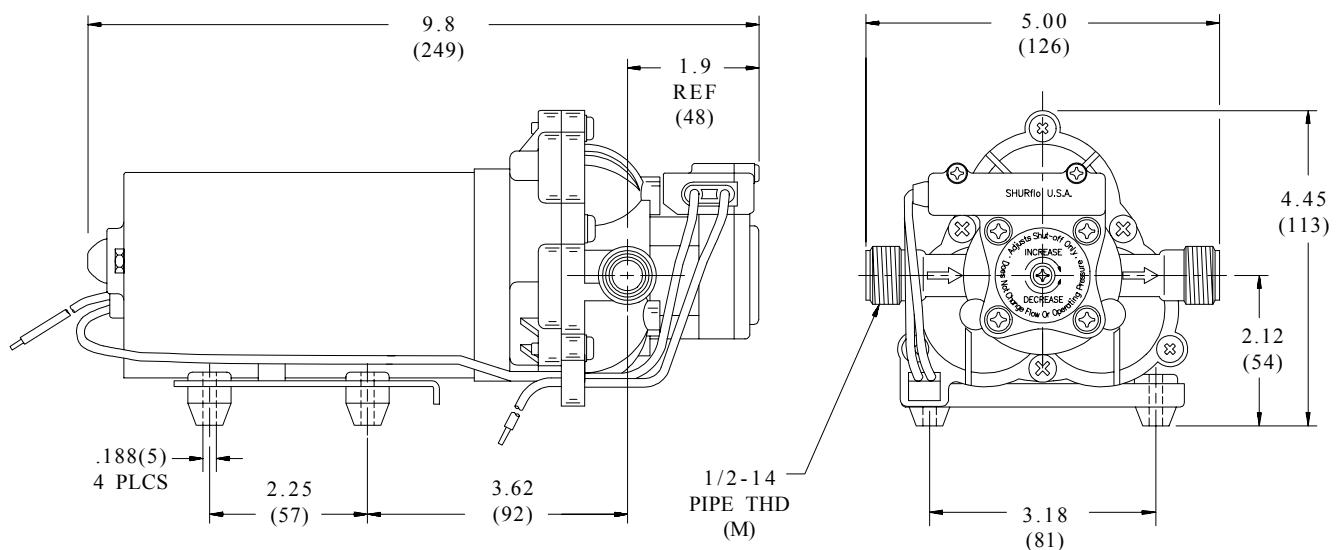


### TEMPERATURE RISE

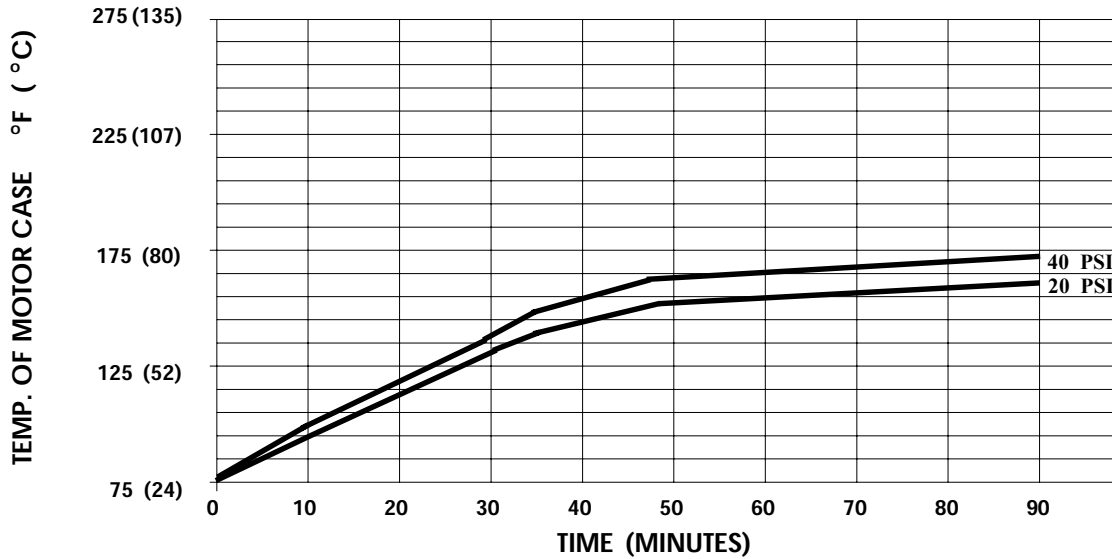

THIS GRAPH IS FOR USE AS A DESIGN GUIDE. IT IS BASED ON RUNNING CONTINUOUSLY WITH AN AMBIENT TEMPERATURE OF 75°F IN STILL AIR. THE THERMAL BREAKER WILL OPEN WHEN THE CASE TEMPERATURE REACHES 280°F .

### TYPICAL PERFORMANCE

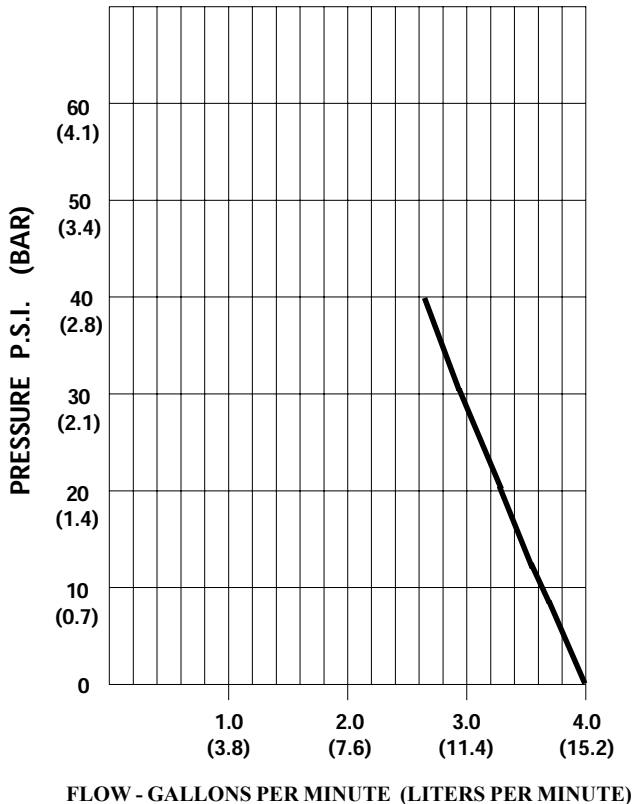

PRESSURE (PSI/BAR)	FLOW (GPM/LIT)	RPM MIN/MAX	CURRENT (AMPS)	VOLTAGE (VOLTS)
OPEN	4.0/15.1	2600/2650	7.1	12 VDC
10	3.6/13.6	2585/2625	9.4	"
20	3.4/12.9	2500/2530	10.4	"
30	3.0/11.4	2440/2470	11.6	"
40	2.7/10.2	2415/2460	12.5	"

*-SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.*

*-ALL DATA BASED ON TESTING WITH WATER.*