



TEMPERATURE RISE

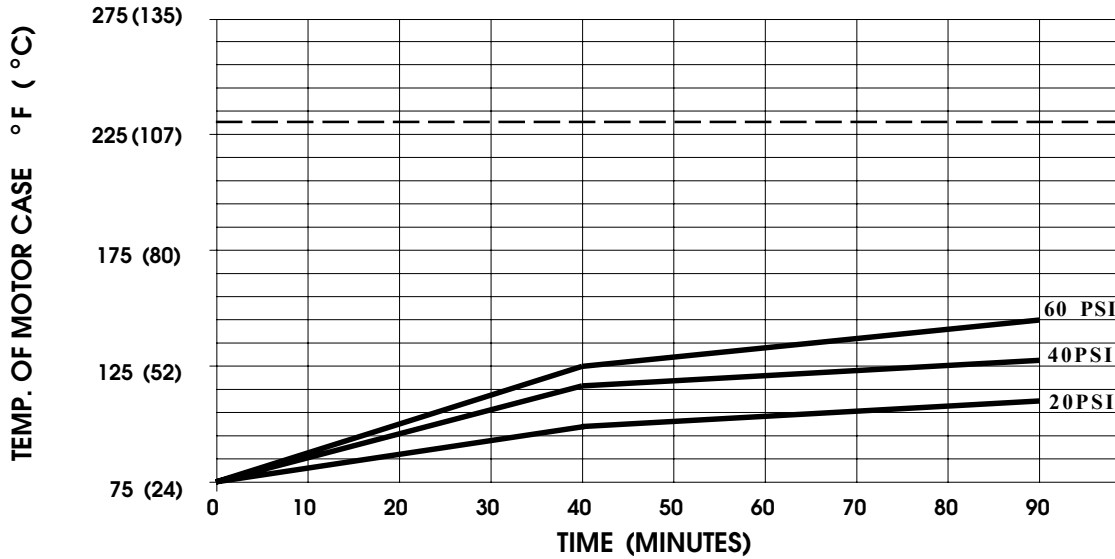

THIS GRAPH IS FOR USE AS A DESIGN GUIDE. IT IS BASED ON RUNNING CONTINUOUSLY WITH AN AMBIENT TEMPERATURE OF 75 °F IN STILL AIR. THE THERMAL BREAKER WILL OPEN WHEN THE CASE TEMPERATURE REACHES 230 °F.

[----- TRIP POINT OF THERMAL PROTECTOR]

TYPICAL PERFORMANCE

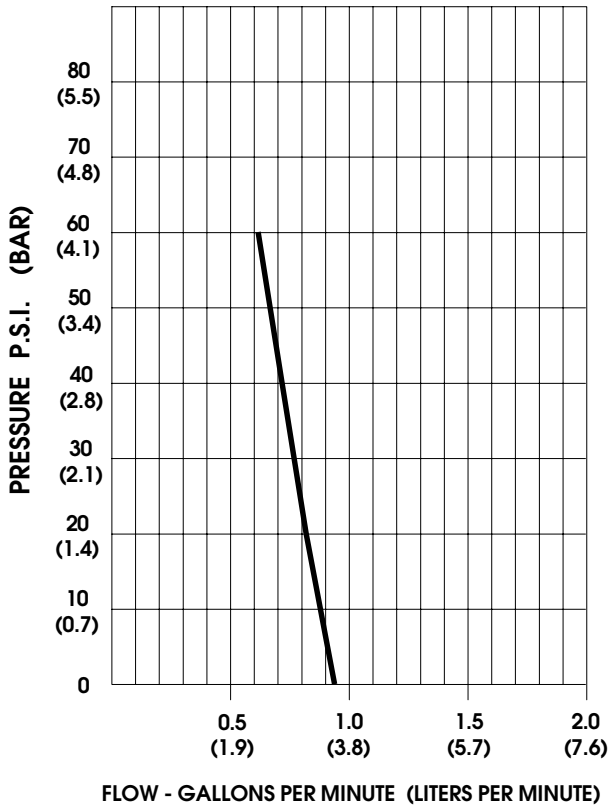

PRESSURE (PSI)	FLOW (GPM/LIT)	RPM MIN/MAX	CURRENT (AMPS)	VOLTAGE (VOLTS)
OPEN	0.95/3.6	1555/1625	0.82	24VAC
10	0.87/3.3	1500/1570	0.99	"
20	0.82/3.1	1445/1515	1.21	"
30	0.75/2.8	1385/1460	1.43	"
40	0.72/2.7	1325/1420	1.62	"
50	0.66/2.5	1290/1375	1.81	"
60	0.62/2.3	1240/1330	1.98	"

-SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

-ALL DATA BASED ON TESTING WITH WATER AT AMBIENT TEMPERATURE.