



TEMPERATURE RISE

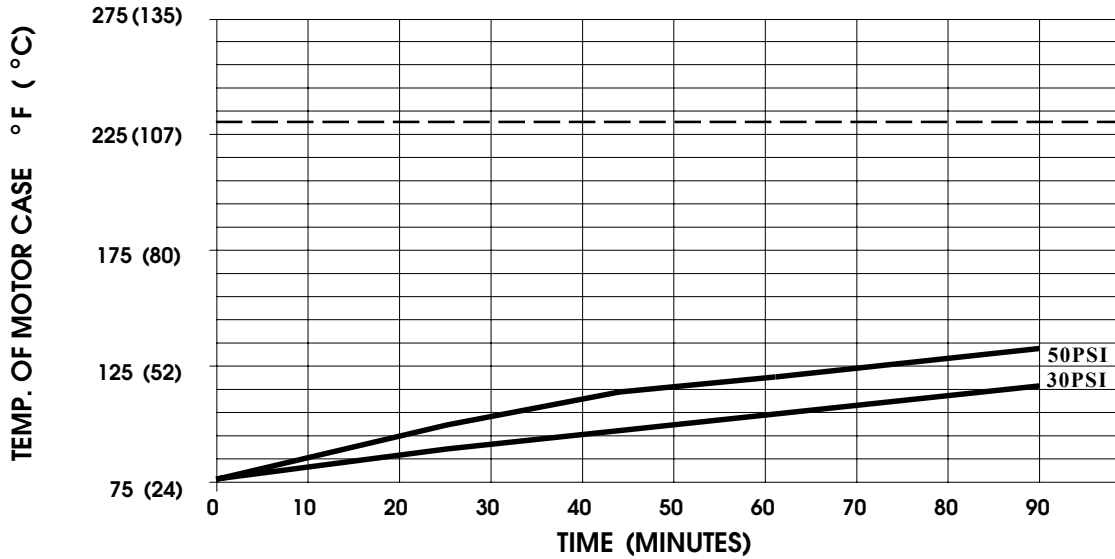

THIS GRAPH IS FOR USE AS A DESIGN GUIDE. IT IS BASED ON RUNNING CONTINUOUSLY WITH AN AMBIENT TEMPERATURE OF 75° F IN STILL AIR. THE THERMAL BREAKER WILL OPEN WHEN THE CASE TEMPERATURE REACHES 230° F.

(- - - - - TRIP POINT OF THERMAL PROTECTOR)

TYPICAL PERFORMANCE

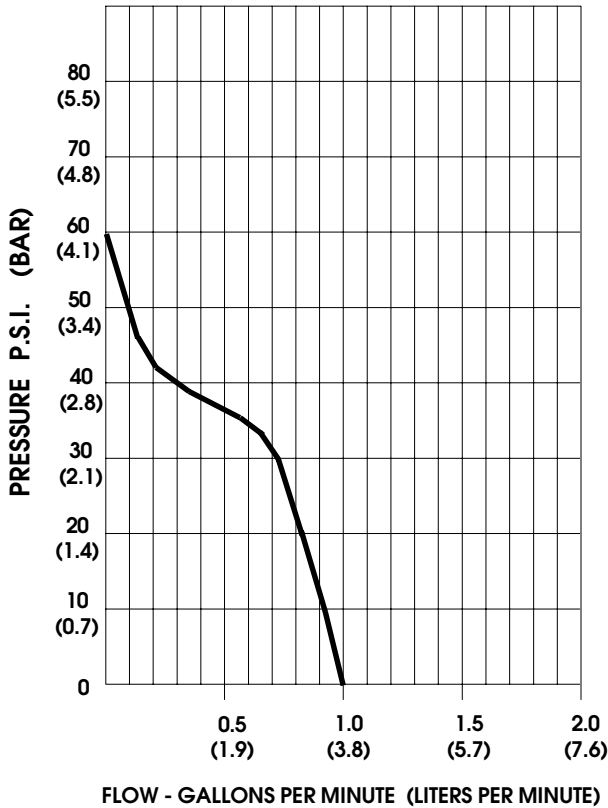

| PRESSURE (PSI) | FLOW (GPM/LIT) | RPM MIN/MAX | CURRENT (AMPS) | VOLTAGE (VOLTS) |
|----------------|----------------|-------------|----------------|-----------------|
| OPEN | 1.00/3.8 | 1540/1555 | 0.82 | 24VAC |
| 10 | 0.95/3.6 | 1500/1515 | 0.99 | " |
| 20 | 0.89/3.4 | 1440/1460 | 1.21 | " |
| 30 | 0.74/2.8 | 1370/1400 | 1.43 | " |
| 40 | 0.41/1.6 | 1305/1340 | 1.62 | " |
| 50 | 0.01/0.3 | 1255/1295 | 1.81 | " |

-SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

-ALL DATA BASED ON TESTING WITH WATER AT AMBIENT TEMPERATURE.